i-CAM

USB 2.0 Intraoral Camera

Simplicity
Flexibility
One Touch
Easy maintenance

Provides image from extreme close-up to full arch without focal adjustment.

Capture button located on the center of the camera for ease of usa

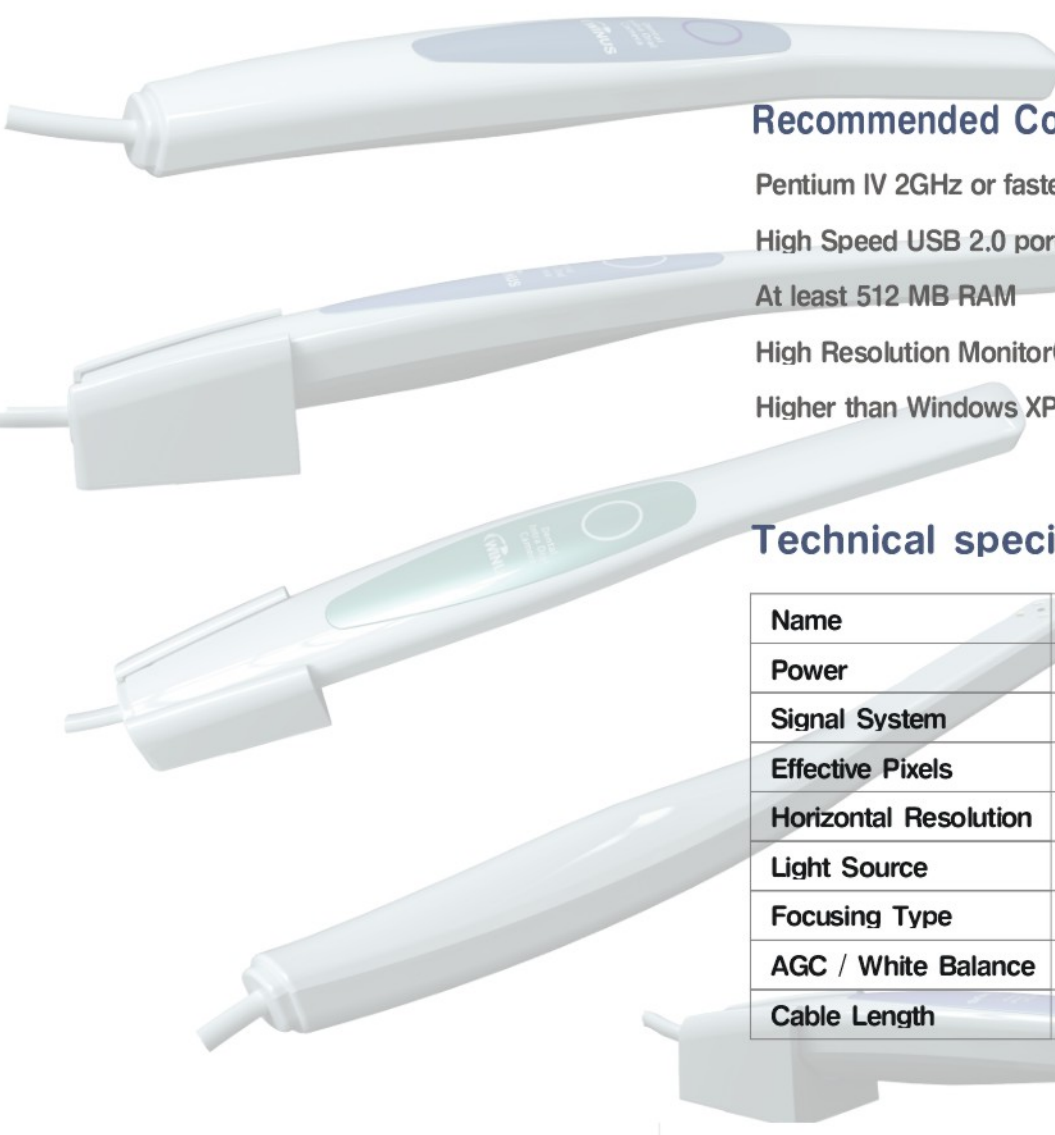Lightweight, portable and transfers easily between operatories

WINUS

Winus Technology Co., Ltd
From the leader in Precision Optical Design

Image Sample

□ Option

Memory Docking (Analog A/V Type)

Memory Docking connects to a TV or video capture card. It has capabilities of saving up to 12 images in memory and controlling all its functions with a click of the button.

USB Docking

Recommended Computer Requirements

Pentium IV 2GHz or faster

High Speed USB 2.0 port

At least 512 MB RAM

High Resolution Monitor(1024 x 768pixels)

Higher than Windows XP with Service Pack3

Technical specifications

Name	i-Cam
Power	DC 5V
Signal System	1/4" High Interline CCD
Effective Pixels	NTSC 510 X 492
Horizontal Resolution	350 TV Lines
Light Source	4 High Luminance LED
Focusing Type	Infinity
AGC / White Balance	Auto
Cable Length	2.7m

WINUS

Winus Technology Co., Ltd
From the leader in Precision Optical Design